

Quadrate Outdoor

OD1015_ 1.0



Wall

GENERAL PRODUCT INFORMATION:


These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product is suitable for wet locations.

This product may be dimmed with a low-voltage electronic dimmer.

This instruction shows a typical installation.

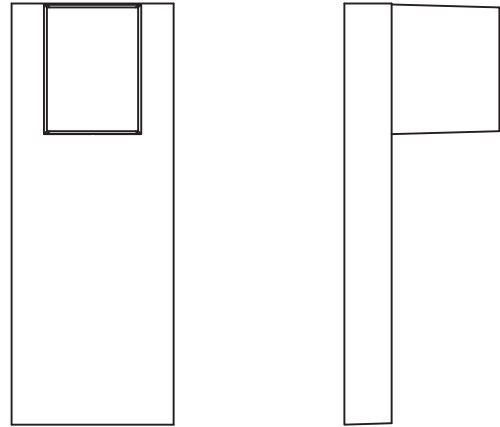


CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

Install the Fixture

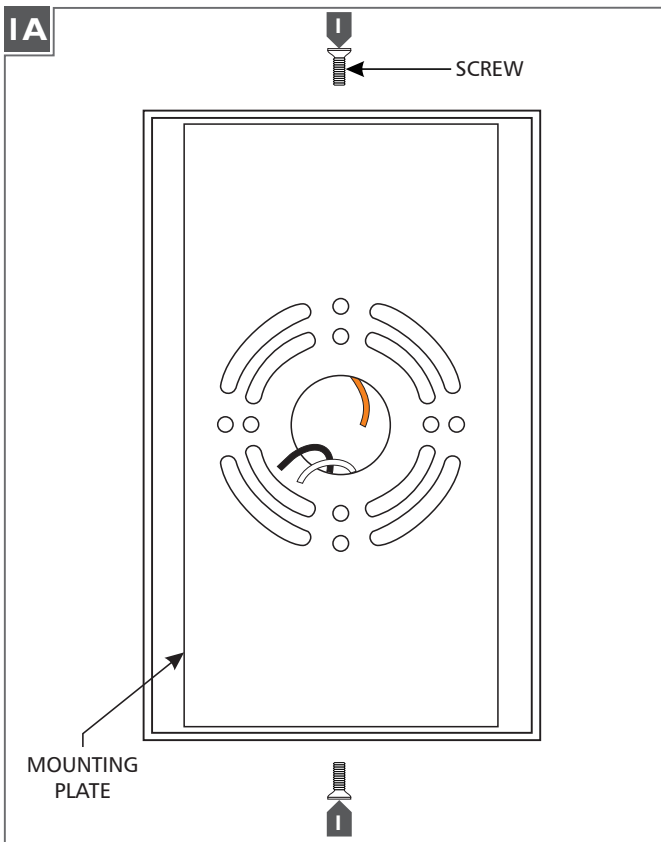


1 Remove the two fixture screws on the top and bottom of the fixture.


2 Remove the mounting plate from the fixture base.

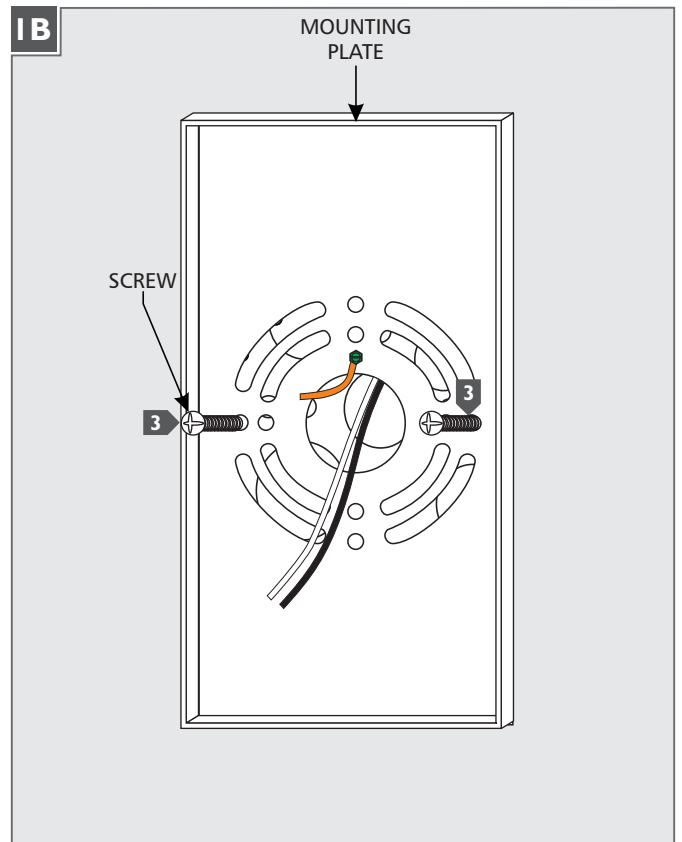

3 Attach the mounting plate to the electrical box using the two #8-32 screws provided.

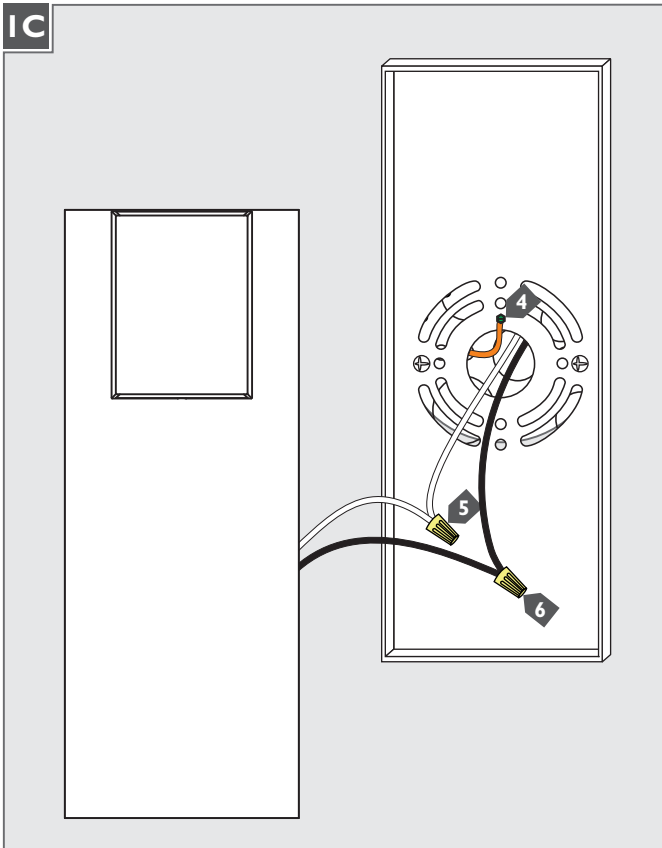

- 4** Connect the mounting plate ground wire to a suitable ground in accordance with local electrical codes.
- 5** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 6** Connect the black fixture wire to the hot power line wire with a wire nut.
- 7** Properly place all wires and wire nut connections into the electrical box and reinstall the fixture base onto the mounting plate (reversal of step 1A).

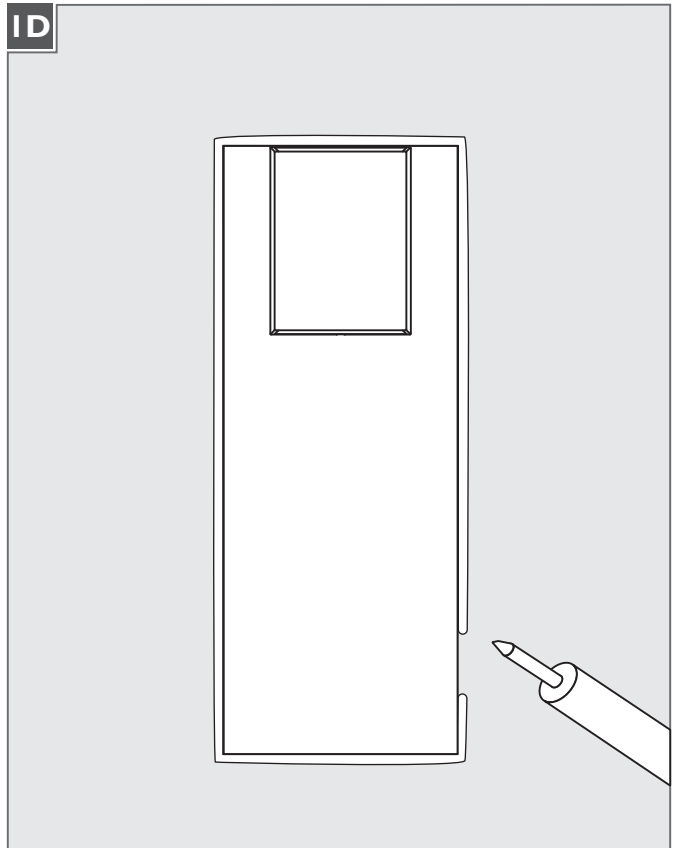

- 8** For wet locations, caulk around the base with waterproof construction sealant.

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077
800.323.3226 - 847.626.6300

www.lblighting.com

© 2017 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company